


GN200

GN200Q


GN200T

OPTIONAL

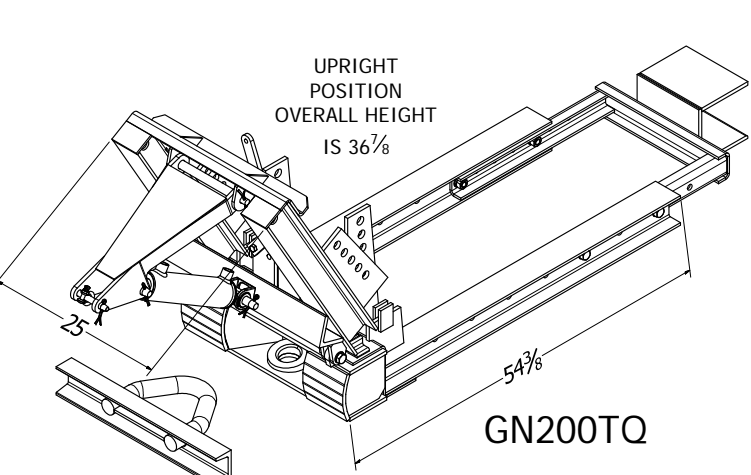


GN200TQ

OPTIONAL

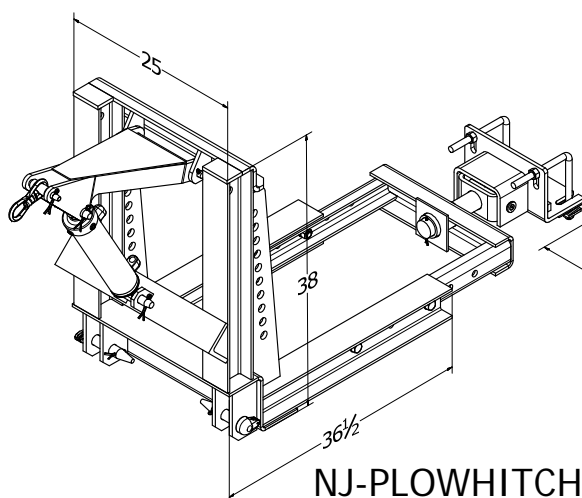

NJ-PLOWHITCH

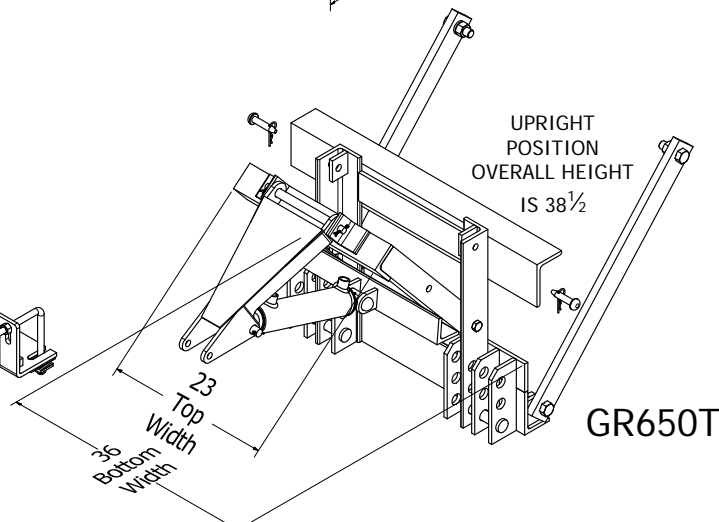


GR650T

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ON STRUCTURAL AND FABRICATED PARTS MUST BE HELD TO A TOLERANCE OF  $\pm .06$  (1.58mm) FOR TWO PLACE DECIMALS, AND  $\pm .010$  (25mm) FOR THREE PLACE DECIMALS. DIMENSIONS WITHIN BRACKETS [ ] ARE MILLIMETERS. WELD SIZES ARE MINIMUM. USE IDENTICAL WELDS ON SIMILAR ITEMS.  $\nabla$  INDICATES MACHINED SURFACES REQUIRING NO FINISH CONTROL. BREAK ALL SHARP CORNERS AND EDGES. DEBURR ALL HOLES. DO NOT SCALE THIS DRAWING FOR DIMENSIONS!


DRAWN Gheath	1/30/2013	<b>GODWIN MFG. CO. INC.</b> DURN NC
CHECKED		
WEIGHT N/A		TITLE <b>PUSH FRAME OPTIONS</b>
MATERIAL		
SIZE D	DWG NO	REV
SCALE	<b>PUSH FRAMES</b>	

SHEET 1 of 2

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

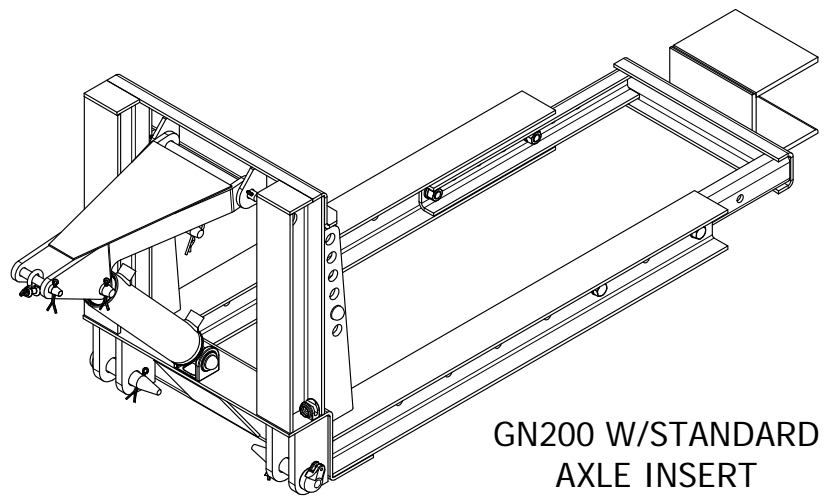


GN200 W/STANDARD  
AXLE INSERT

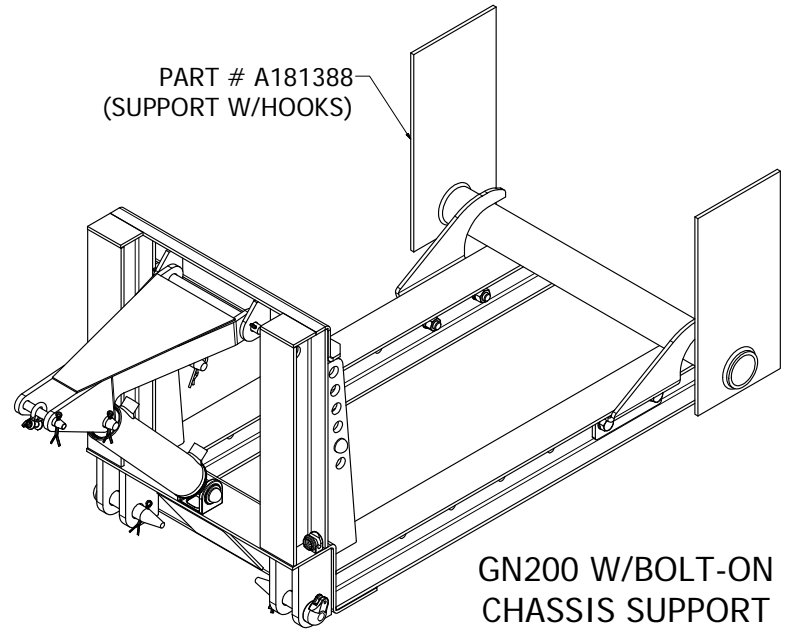

PART # A181388  
(SUPPORT W/HOOKS)

GN200 W/BOLT-ON  
CHASSIS SUPPORT

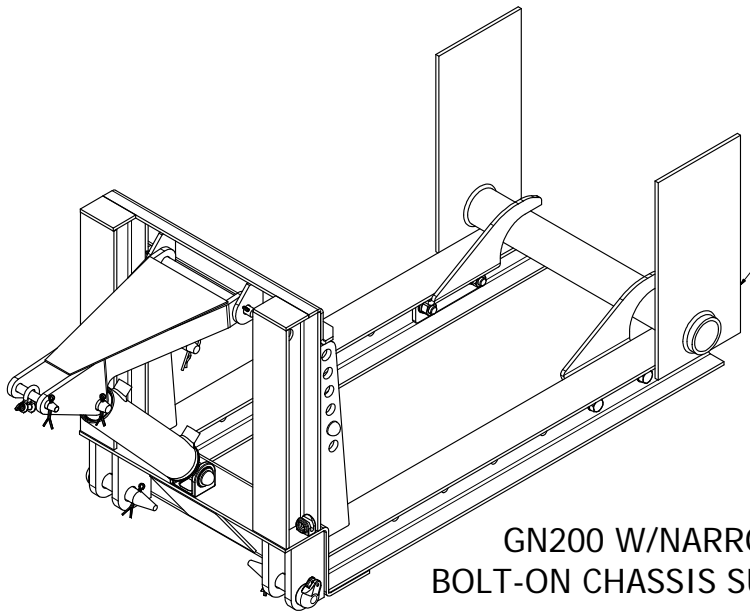

PART # A181389  
(SUPPORT W/HOOKS)

GN200 W/NARROW  
BOLT-ON CHASSIS SUPPORT

**NOTE:**  
INSERT OPTIONS ARE SHOWN ON  
GN200 STANDARD UNIT BUT WILL  
WORK WITH TILT AND OR QUICK  
HITCH OPTIONS FOR THE GN200.

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ON STRUCTURAL AND FABRICATED PARTS MUST BE HELD TO A TOLERANCE OF ±.06 (1.58mm) FOR TWO PLACE DECIMALS, AND ±.010 (25mm) FOR THREE PLACE DECIMALS. DIMENSIONS WITHIN BRACKETS ( ) ARE MILLIMETERS. WELD SIZES ARE MINIMUM. USE IDENTICAL WELDS ON SIMILAR ITEMS. ▽ INDICATES MACHINED SURFACES REQUIRING NO FINISH CONTROL. BREAK ALL SHARP CORNERS AND EDGES. DEBURR ALL HOLES. DO NOT SCALE THIS DRAWING FOR DIMENSIONS!			
DRAWN Gheath	1/30/2013	<b>GODWIN MFG. CO. INC.</b> DURN NC	
CHECKED		TITLE	
WEIGHT N/A		PUSH FRAME OPTIONS	
MATERIAL		REV	
		SIZE D	DWG NO PUSH FRAMES
		SCALE	SHEET 2 of 2

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1